

## Seaming tool PS 55

# For clamping and positioning components with a smooth surface





Simply better.



### Your benefits at a glance:


- 1 Gentle suction cups**  
Easy to use. Engage the handle on the suction cups to generate a vacuum, and the seaming tool adheres automatically to the sheet.
- 2 Practical cam levers**  
The two levers on the guide bars can be used to easily control the height differences which can occur when pulling together the sheets.
- 3 Sturdy construction**  
Cold-drawn, electro-galvanised guide rods in sturdy aluminium profiles prevent the seaming tool from bending open during the clamping process and hold the seaming tool on one level. This guarantees a precise finished result.
- 4 Ergonomic wooden handle**  
With the perfect handle, you can achieve up to 260 N of clamping force in the horizontal plane. This need is met by the ergonomic wooden handle and the burr-free, rivetted spindle with acme thread.

YouTube

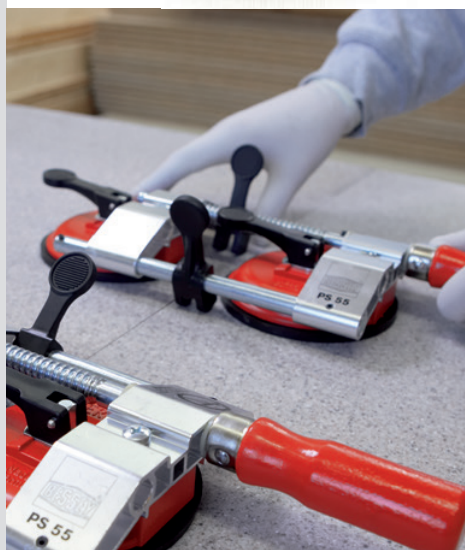


### Seaming tool PS 55

Order-No.	Opening	Width	Length		
	mm	mm	mm	kg	V3
PS55	10-55	147	361	1.55	

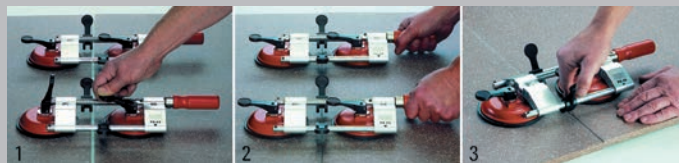

- For clamping and positioning components with a smooth surface, such as ceramic, granite, Corian®, plastic, sheet metal and glass, which require low clamping forces (up to 260 N)
- Clamping levers on the suction cups ensure rapid handling
- Cam lever to compensate for differing heights at the joint

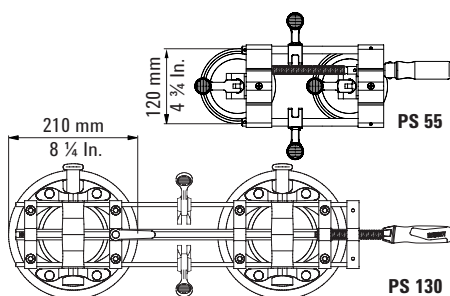

Corian® is a registered trademark of DuPont